





LIFE TECHNOLOGY

6" MOTOR

Motore - Motor - Moteur 60 Hz - 3450 rpm						Uscita cavi - Cable outlets - Sortie des câbles				Lunghezza cavo standard Std Cable length m	
						Sezione in mm ² - Cross section mm ² - Section en mm ²					
Tipo - Type	Power		V 230	V 400	V 460	DN	Avviamento - Starting				
	kW	HP	A	A	A		Diretto - Direct - Direct		Stella Triangolo - Star Delta		
							230 V +/- 5%	400 V +/- 5%	230/240 V	400/690 V	
P 605	4	5,5	17	10	8,6	6"	4x4	4x2,5	2x(4x4)	2x(4x2,5)	3
P 607	5,5	7,5	21,5	12,5	10,8		4x4	4x2,5	2x(4x4)	2x(4x2,5)	
P 610	7,5	10	29,5	17	15,1		4x6	4x4	2x(4x6)	2x(4x4)	
P 612	9,2	12,5	36	21	18,1		4x6	4x4	2x(4x6)	2x(4x4)	
P 615	11	15	42,5	24,5	21,1		4x6	4x4	2x(4x6)	2x(4x4)	
P 617	13	17,5	49	28	24,1		4x10	4x6	2x(4x10)	2x(4x6)	
P 620	15	20	55,5	32	27,5		4x10	4x6	2x(4x10)	2x(4x6)	
P 625	18,5	25	69	40	34,4		4x16	4x10	2x(4x16)	2x(4x10)	
P 630	22	30	82	47,5	40,9		4x16	4x10	2x(4x16)	2x(4x10)	
P 635	26	35	95	55	47,3		4x16	4x10	2x(4x16)	2x(4x10)	
P 640	30	40	108	62,5	53,8		2x(4x16)	4x16	2x(4x16)	2x(4x16)	
P 650	37	50	135	78	67,1		2x(4x16)	4x16	2x(4x16)	2x(4x16)	

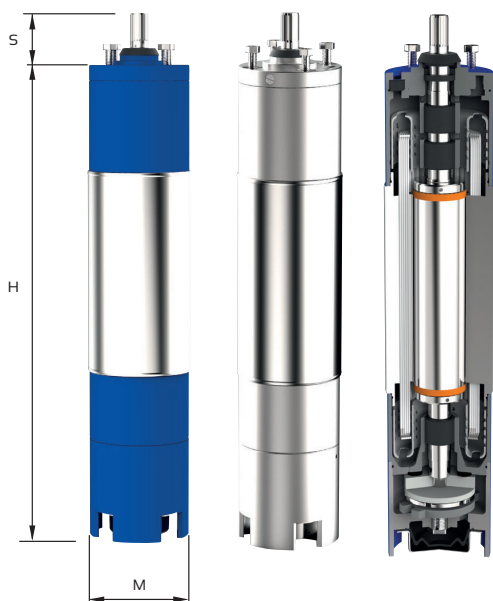

Motore - Motor - Moteur 60 Hz - 3450 rpm		Dimensioni di ingombro e pesi Overall dimensions and weights			
Tipo - Type		H mm	S mm	M mm	P kg
P 605		646	73,2	145	40
P 607		671			45
P 610		701			55
P 612		751			60
P 615		811			65
P 617		841			70
P 620		931			75
P 625		991			83
P 630		1071			92
P 635		1181			100
P 640		1251			108
P 650		1341			118

Versione Standard con supporti motore in ghisa G25.
Standard version with motor supports in cast iron G25
 Version standard avec supports de moteur en fonte G25
 Versión estándar con soportes de motor en hierro fundido G25

Disponibile anche in AISI 304, AISI 316, Duplex, AISI 904
Available also in AISI 304, AISI 316, DUPLEX and AISI 904
 Disponible aussi en AISI 304, AISI 316, DUPLEX and AISI 904
 Disponible tambien en AISI 304, AISI 316, DUPLEX and AISI 904

Su richiesta, è possibile personalizzare la lunghezza del cavo
Cable length can be customized upon request
 Possibilité de personnaliser la longueur du câble
 Largo del cable personalisable sobre demanda

Sensore di temperatura PT 100 disponibile su richiesta
PT100 temperature sensor available upon request
 Disponibilité du senseur de température PT100 sur demande
 Sensor de temperatura PT100 disponible sobre demanda